




Specifications

Buckets suitable for 30 to 37 ton Weight excavators

Trench Buckets
Our Ref:

SAO209




Part	Material
Side Reinforcer	30mm
Lower side reinforcer	40mm 400HB
Lower Side Plate	25mm
upper side plate	12mm
Top Beam	168mm tube
Toe Plate	50mm x 300mm 400HB
Teeth	Cat 235 (Kingmet 55 optional)
Wear Ribs	20mm Horizontals

Part No.	Width (")	(mm)	Capacity
209/24	24"	610mm	0.78
209/30	30"	762mm	0.99
209/36	36"	914mm	1.21
209/42	42"	1067mm	1.42
209/48	48"	1219mm	1.61
209/54	54"	1372mm	1.85
209/60	60"	1524mm	2.09
209/66	66"	1676mm	2.28

Grading Buckets
Our Ref:

SAO 300

Part	Material
Side Reinforcer	25mm
Side Plate	12mm
Centre Rib	25mm
Top Beam	120mm tube
Toe Plate	40mm x 300mm 280HB
wear ribs	15mm Horizontals

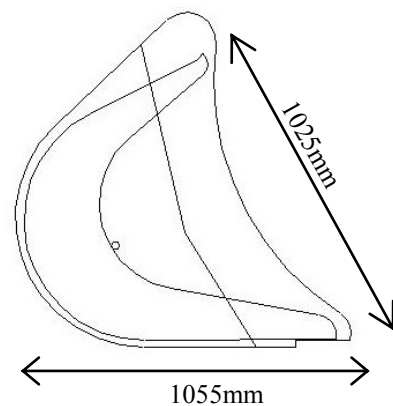

Part No.	Width (")	(mm)	Capacity
300/84	84"	2134mm	1.61
300/96	96"	2438mm	1.81
300/108	108"	2743mm	2.04
300/120	120"	3048mm	2.28

Capacities are in Cubic Metres SAE heaped