




Specifications

Buckets suitable for 38 to 48 ton Weight excavators

Trench Buckets
Our Ref:

SAO207

Part	Material
Side Reinforcer	30mm
Lower side reinforcer	40mm 400HB
Lower Side Plate	30mm
upper side plate	12mm
Top Beam	202mm tube
Toe Plate	50mm x 300mm 400HB
Teeth	Cat 235 (Kingmet 55 optional)
Wear Ribs	20mm Horizontals




Part No.	Width (")	(mm)	Capacity
207/24	24"	610mm	0.85
207/30	30"	762mm	1.09
207/36	36"	914mm	1.33
207/42	42"	1067mm	1.55
207/48	48"	1219mm	1.81
207/54	54"	1372mm	2.03
207/60	60"	1524mm	2.26
207/66	66"	1676mm	2.49

Grading Buckets
Our Ref:

SAO 185

Part	Material
Side Reinforcer	30mm
Side Plate	15mm
Centre Rib	30mm
Top Beam	168mm tube
Toe Plate	40mm x 300mm 280HB
wear ribs	20mm Horizontals

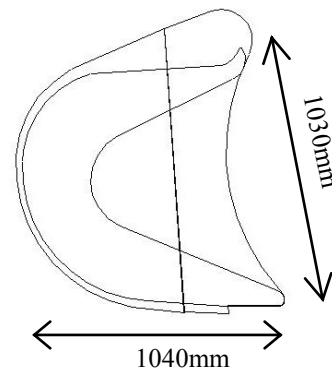

Part No.	Width (")	(mm)	Capacity
185/84	84"	2134mm	1.59
185/96	96"	2438mm	1.81
185/108	108"	2743mm	2.03
185/120	120"	3048mm	2.28

Bolt on reversable blades available POA

Capacities are in Cubic Metres SAE heaped