





Specifications

20 to 27 ton Concrete Pulverisor

Abiljo Pulverisors are designed to be operated direct from the machines existing hydraulics without the need of an extra hydraulic service
 They mount directly to the end of the dipper and link as with a bucket and then have a brace arm which pins to the underside of the dipper using a brace pad (supplied) to hold the fixed half in place


The lower crushing legs and toeplates are manufactured completely from Hardox 400 and 450 type material for strength and for increased attachment life

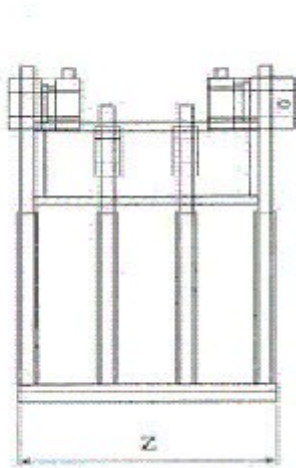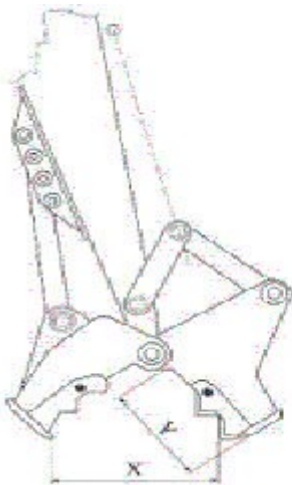

Material Specs:

- 4 leg fixed half:
 - 4 x 40mm Hardox 450 legs
 - 2 x 40mm Hardox 450 toeplates
- 3 leg moving half:
 - 2 x 40mm Hardox 450 outer legs
 - 1 x 60mm Hardox 450 main nose (central leg)
 - 1 x 40mm Hardox 450 toeplate

Carrier weight	Part No.	Jaw Opening (X) approx	Fixed Jaw Width (Z)	Jaw depth (Y)	Weight
20 to 27 ton	P200	850mm	600mm	655mm	1355kg

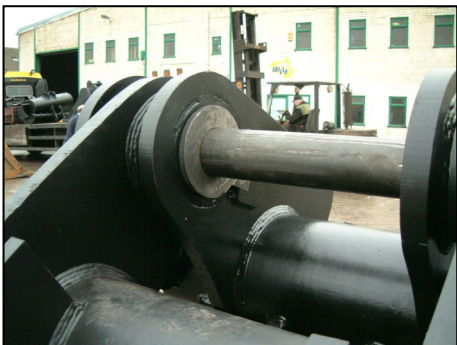

The Pulverisor hinges on the main dipper pin and comes complete with a longer hardened main pin.
 The main hinge uses 2 hardened top hat bushes to hold the 2 halves together when the main pin is removed, and the hinge also has replace-able hardened insert bushes.

