




Specifications

Boxed Leg Demolition grabs

Demolition specification grabs are designed for general demolition work and are lighter than the rock grabs so they can be used at reach for taking buildings down etc.

All grapples require a 3 point brace pad welding to the underside of the dipper to hold the fixed half of the grab in place. All grabs are supplied c/w the brace arm and weld on pad and are available for direct mount, supplied with a hardened main pin and top hats or can be supplied for quick hitch mounting

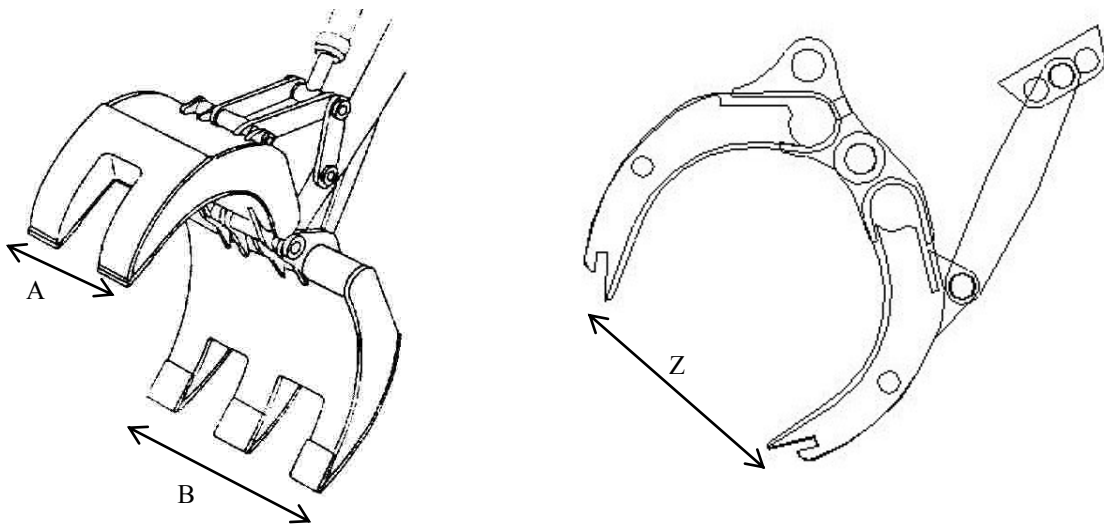

Machine size	Moving jaw Width (A)	Static jaw Width (B)	Max opening (Z)	Demolition specification		Price Q/h setup
				Part No.	Weight (kg)	
7 to 9 ton	500mm	850mm	1750mm	DG70	300	£1,600.00
9 to 11 ton	500mm	850mm	1750mm	DG90	500	£1,950.00
12 to 15 ton	750mm	1100mm	2300mm	DG130	735	£3,922.00
16 to 19 ton	750mm	1100mm	2300mm	DG160	1250	£4,552.00
20 to 27 ton	750mm	1200mm	2700mm	DG200	1600	£5,798.00
28 to 37 ton	760mm	1300mm	2900mm	DG280	2200	£7,405.00
38 to 48 ton	760mm	1300mm	3500mm	DG380	2600	£11,695.00

