



Specifications


Solid leg grabs

Solid leg grabs are designed for waste and scrap handling as well as light demolition work

Solid leg grabs are manufactured to fit both on Quick Hitch and direct mount, with no modifications required.

All grabs are supplied complete with the weld on 3 point pad and brace arm

The standard price is for a 3+2 leg configuration but they are also available in 4+3 and 5+4 configurations.

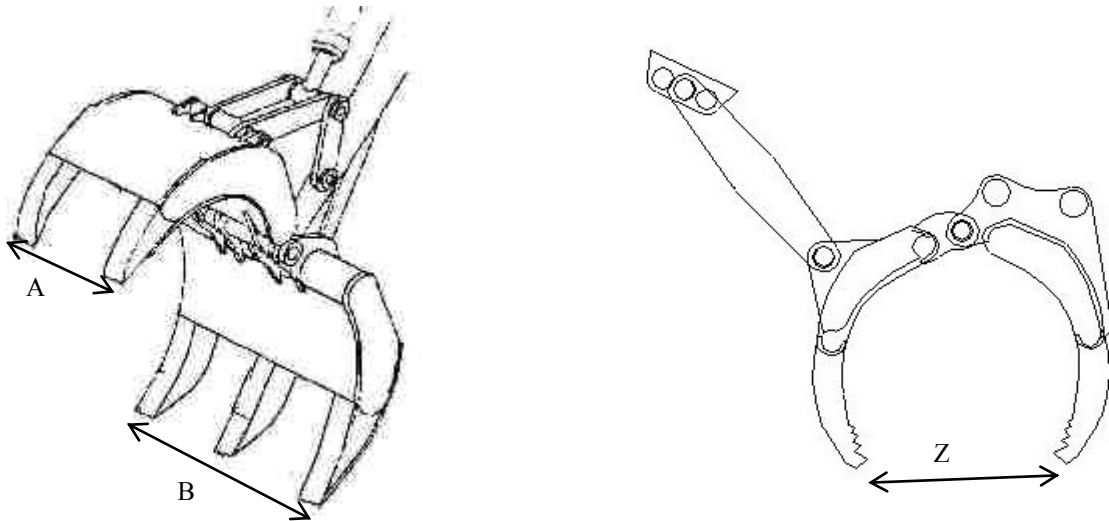

Machine size	Part No.	Moving jaw width (A)	Static Jaw width (B)	Max opening (Z)
1 to 2 ton	SLG10	230mm	420mm	600mm
2 to 4 ton	SLG20	320mm	590mm	950mm
5 to 9 ton	SLG60	500mm	850mm	1750mm
9 to 11 ton	SLG90	600mm	950mm	1850mm
12 to 15 ton	SLG130	750mm	1100mm	2300mm
16 to 19 ton	SLG160	750mm	1100mm	2300mm
20 to 27 ton	SLG200	750mm	1200mm	2700mm

